

**Aumictech**

Test & measurement • bought, sold, repaired, calibrated


Data Sheet

August 15, 2026

ACUITY BRANDS / LITHONIA

Acuity Brands / Lithonia 360499 MS Matching Switch

Acuity Brands / Lithonia 360499 MS Matching Switch Queue model 360499 isaAcuity Brands / Lithonia MS matching switch. Lithonia MS matching switches context is host-family documentation, notasubstitute for this SKU drawing. Exact ratings are on the 360499 nameplate and drawing. Applications lighting matching-switch control in Lithonia systems that specify 360499 in systems that specify 360499. Literature: remaining-queue listing Acuity Brands / Lithonia 360499 MS Matching Switch Queue model 360499 isaAcuity Brands / Lithonia MS matching switch. Lithonia MS matching switches context is host-family documentation, notasubstitute for this SKU drawing. Exact ratings are on the 360499 nameplate and drawing. Applications lighting matching-switch control in Lithonia systems that specify 360499 in systems that specify 360499. Literature: remaining-queue listing Acuity Brands / Lithonia 360499 MS Matching Switch System Role: lighting matching-switch control in Lithonia systems that specify 360499

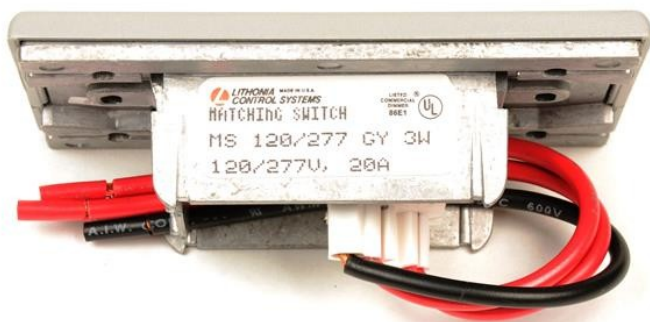

MODEL

**Acuity Brands /
Lithonia 360499**

CALIBRATION

**Available on
request**

CONDITION

Used

STATUS

In stock

RFQ / SKU

360499

LISTING

[https://aumictechlabs.c
om/products/360499-
2/](https://aumictechlabs.com/products/360499-2/)

NIST-traceable cal

SAM registered

30-day returns

NAICS 423690 • 811210 • 541380

This unit

The Acuity Brands / Lithonia 360499 MS Matching Switch is a replacement control component engineered for integration with MS Series LED luminaires and compatible lighting systems. Operating across 120–277V with 0-10V dimming protocol, this switch delivers reliable command and monitoring capability within networked lighting installations. Available in black and white finishes, it pairs with wall-mounted controls, luminaires, and mobile management via the CLAIRITY+ app.

Technical Specifications
Model: 360499 MS Matching Switch
Manufacturer: Acuity Brands / Lithonia
Voltage Rating: 120–277V
Dimming Protocol: 0-10V
Available Colors: Black, White

Key Features
0-10V dimming compatible with standard drivers (down to 5%) and optional EldoLED drivers (down to 1%)
Through-wiring support for continuous-row installations using optional PLR through-wire harnesses
Mobile control via CLAIRITY+ app for remote sensor adjustment and configuration
Network integration with nLight Wired Networking and nLight AIR Wireless Platform for multi-zone control and remote monitoring
Reliable field-replaceable design for MS Series deployment

Typical Applications
MS Series LED luminaire control within commercial and institutional lighting systems
Multi-fixture installations requiring coordinated dimming and scene management
Networked lighting environments leveraging nLight platform infrastructure
Installations demanding wireless or hardwired sensor-based control

Compatibility & Integration
The 360499 pairs with MS Series luminaires, nLight control nodes, and external 0-10V dimming systems. CLAIRITY+ mobile app integration enables field configuration without site visits. Through-wiring harnesses permit daisy-chain deployment across continuous-row layouts, reducing wiring complexity and installation labor. Compatible with both wired nLight networks and nLight AIR wireless control zones.

360499 Characteristics / Specifications

PARAMETER	VALUE
Model	360499
Instrument Type	MS matching switch
Manufacturer	Acuity Brands / Lithonia
Literature	remaining-queue listing Acuity Brands / Lithonia 360499 MS Matching Switch
Family	Lithonia MS matching switches
Form Factor	as installed per drawing
System Role	lighting matching-switch control in Lithonia systems that specify 360499
Brand Lineage	Acuity Brands / Lithonia
Queue Title	Acuity Brands / Lithonia 360499 MS Matching Switch
Documentation Type	OEM remaining-queue listing
Use Case	lighting matching-switch control in Lithonia systems that specify 360499
Vendor Path	Acuity Brands / Lithonia
Year Class	360499 generation
Application Class	MS matching switch
Module Class	MS matching switch
Host Class	host on the drawing
Connector Class	connectors on the drawing
Ate Class	industrial / lab ATE class
Control Class	front panel / firmware on the drawing
Environment Class	ambient on the nameplate
Voltage Class	volts on the nameplate
Current Class	amperes on the nameplate
Config	360499 remaining-queue suffix
Function Class	function on the drawing

PARAMETER

VALUE

Switch Role

MS matching switch

Lighting Role

Acuity / Lithonia lighting control

360499 Specifications

PARAMETER	VALUE
Acuity Brands / Lithonia 360499 MS Matching Switch	Overview
Applications	lighting matching-switch control in Lithonia systems that specify 360499 in systems that specify 360499.
Key Features	Acuity Brands / Lithonia 360499
Technical Specifications	Model: 360499
Notes	From remaining-queue title (Acuity Brands / Lithonia 360499 MS Matching Switch). Electrical rating is on the 360499 nameplate.

Full OEM specifications

Complete technical content extracted from the manufacturer datasheet. Sparse OEM tables are reconstructed as tables below; other text is preserved as paragraphs.

Specifications	
Specifications	
PARAMETER	VALUE
Model	360499
Instrument Type	MS matching switch
Manufacturer	Acuity Brands / Lithonia
Literature	remaining-queue listing Acuity Brands / Lithonia 360499 MS Matching Switch
Family	Lithonia MS matching switches
Form Factor	as installed per drawing
System Role	lighting matching-switch control in Lithonia systems that specify 360499
Brand Lineage	Acuity Brands / Lithonia
Queue Title	Acuity Brands / Lithonia 360499 MS Matching Switch
Documentation Type	OEM remaining-queue listing
Use Case	lighting matching-switch control in Lithonia systems that specify 360499
Vendor Path	Acuity Brands / Lithonia
Year Class	360499 generation
Application Class	MS matching switch
Module Class	MS matching switch
Host Class	host on the drawing
Connector Class	connectors on the drawing
Ate Class	industrial / lab ATE class
Control Class	front panel / firmware on the drawing
Environment Class	ambient on the nameplate
Voltage Class	volts on the nameplate
Current Class	amperes on the nameplate
Config	360499 remaining-queue suffix
Function Class	function on the drawing

PARAMETER	VALUE
Switch Role	MS matching switch
Lighting Role	Acuity / Lithonia lighting control

Notes
From remaining-queue title (Acuity Brands / Lithonia 360499 MS Matching Switch). Electrical rating is on the 360499 nameplate.

Available from Aumictech

Used and refurbished unit evaluated in-house. Calibration: Available on request. Used · In stock.

Request a quote: sales@aumictech.com · +1 (484) 841-9341

Aumictech

788 S 500 E, Pleasant Grove, UT 84062
sales@aumictech.com · +1 (484) 841-9341
<https://aumictechlabs.com>

NIST-traceable calibration · SAM registered ·
30-day returns
NAICS 423690 · 811210 · 541380
Generated August 15, 2026

Technical content from manufacturer specifications. Unit photo/stock from Aumictech listing when available. Specifications subject to OEM documentation and unit condition.