

**Aumictech**

Test & measurement · bought, sold, repaired, calibrated


Data Sheet

August 15, 2026

FLUKE

Fluke 3.8mm x 1m Borescope Probe

The Fluke 3.8MM/1M Probe Scope features a 3.8 mm diameter camera probe with a 1-meter long cable, designed for visual inspections in hard-to-reach areas. This probe is compatible with select Fluke inspection cameras, providing high-quality images and video for detailed analysis. Ideal for automotive, HVAC, and industrial applications, this probe scope helps identify potential issues without extensive disassembly.

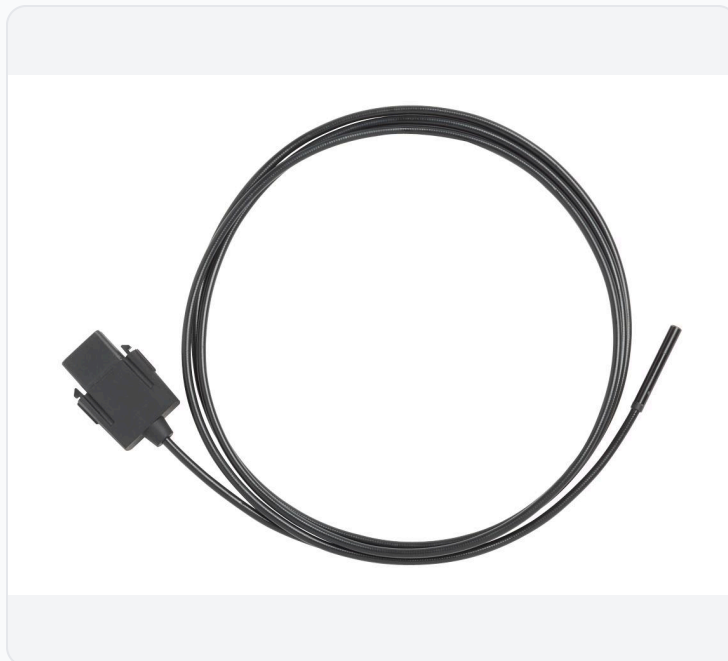

MODEL Fluke 3.8MM/1M Probe	CALIBRATION Available on request
CONDITION Used	STATUS In stock
RFQ / SKU 3.8MM/1M Probe	LISTING https://aumictechlabs.com/products/3-8mm-1m-probe-2/

NIST-traceable cal

SAM registered

30-day returns

NAICS 423690 · 811210 · 541380

This unit

The Fluke 3.8MM/1M Probe Scope enhances the functionality of compatible Fluke inspection cameras, perform detailed visual inspections in confined spaces. With its small 3.8 mm diameter, the probe can access narrow openings, while the 1-meter cable provides extended reach. The high-quality camera captures clear images and videos, facilitating accurate diagnostics and maintenance. This tool is essential for professionals needing to inspect engines, HVAC systems, and industrial equipment without costly and time-consuming disassembly.

38MM1MPROBE Characteristics / Specifications

PARAMETER	VALUE
Model	3.8MM/1M Probe
Brand	Fluke
Catalog Title	Fluke 3.8mm x 1m Borescope Probe
Sku	3.8MM/1M Probe
Product Class	catalog accessory or spare
Listing Status	published catalog item
Document Class	accessory or spare identity sheet
Numeric Table Status	no public OEM numeric table for this exact SKU
Identity Source	Aumictech product catalog listing
Parent System	as named in the catalog title
Form Factor	accessory or spare hardware
Use Role	replacement or configuration accessory
Electrical Limits	not published for this SKU; see parent instrument datasheet
Mechanical Limits	not published for this SKU; see packing list or faceplate
Interface	as implied by the catalog title and parent family
Configuration Code	3.8MM/1M Probe
Manufacturer Line	Fluke
Documentation Note	thin accessory sheet
Calibration Class	notastandalone calibrated instrument unless the title states otherwise
Replacement Class	catalog spare or accessory
Public Spec Density	identity only

Full OEM specifications

Complete technical content extracted from the manufacturer datasheet. Sparse OEM tables are reconstructed as tables below; other text is preserved as paragraphs.

performance table. The rows below are verified catalog identity from the product listing. Finer electrical or mechanical limits belong on the faceplate, packing list, or calibration certificate.

Applications

Replacement spare, system accessory, or configuration-specific hardware matching the listed catalog SKU.

Key Features

Catalog identity matched to brand, model, and SKU

Accessory or spare class rather than standalone instrument

No invented electrical performance numbers

Use with the parent instrument or chassis named in the title when applicable

Documented as thin because OEM numeric tables are not public

Technical Specifications

PARAMETER	VALUE
Model	3.8MM/1M Probe
Brand	Fluke
Catalog Title	Fluke 3.8mm x 1m Borescope Probe
Sku	3.8MM/1M Probe
Product Class	catalog accessory or spare
Listing Status	published catalog item
Document Class	accessory or spare identity sheet
Numeric Table Status	no public OEM numeric table for this exact SKU
Identity Source	Aumictech product catalog listing
Parent System	as named in the catalog title
Form Factor	accessory or spare hardware
Use Role	replacement or configuration accessory
Electrical Limits	not published for this SKU; see parent instrument datasheet
Mechanical Limits	not published for this SKU; see packing list or faceplate
Interface	as implied by the catalog title and parent family
Configuration Code	3.8MM/1M Probe
Manufacturer Line	Fluke
Documentation Note	thin accessory sheet
Calibration Class	not standalone calibrated instrument unless the title states otherwise
Replacement Class	catalog spare or accessory

PARAMETER	VALUE
Public Spec Density	identity only

Notes
ALLOW_THIN: true accessory/spare with no public numeric table. Do not invent ranges, accuracies, or power levels. Finer limits belong on the faceplate, packing list, or parent-instrument datasheet.

Available from Aumictech

Used and refurbished unit evaluated in-house. Calibration: Available on request. Used · In stock.

Request a quote: sales@aumictech.com · +1 (484) 841-9341

Aumictech

788 S 500 E, Pleasant Grove, UT 84062
sales@aumictech.com · +1 (484) 841-9341
<https://aumictechlabs.com>

NIST-traceable calibration · SAM registered ·
30-day returns
NAICS 423690 · 811210 · 541380
Generated August 15, 2026

Technical content from manufacturer specifications. Unit photo/stock from Aumictech listing when available. Specifications subject to OEM documentation and unit condition.